

BASIC

IP20 LED PANEL

BASIC PANEL LIGHT



100lm/W



IP20



5 YEAR
WARRANTY



UGR<19



SDCM<4



UL94V-2

PERFORMANCE

Power: 18W, 22W, 36W, 60W

Efficacy: Up to 100lm/W

Instant ON/OFF

Ra: >80 and >90 (optional)

CCT: 3000K/4000K/5000K/6000K

Thickness: 10mm

Lifetime: >50,000hours

Ingress Protection: IP20

Operating Temperature: 0°C ~ +40°C

Warranty: 5 years limited

Flicker free illumination

Mounting: Recessed/Suspended/



Flanged/Surface

Symmetrical uniform distribution


Quick and Easy installation

Colour: White & Aluminum

110deg(Standard) 75deg(UGR<19)

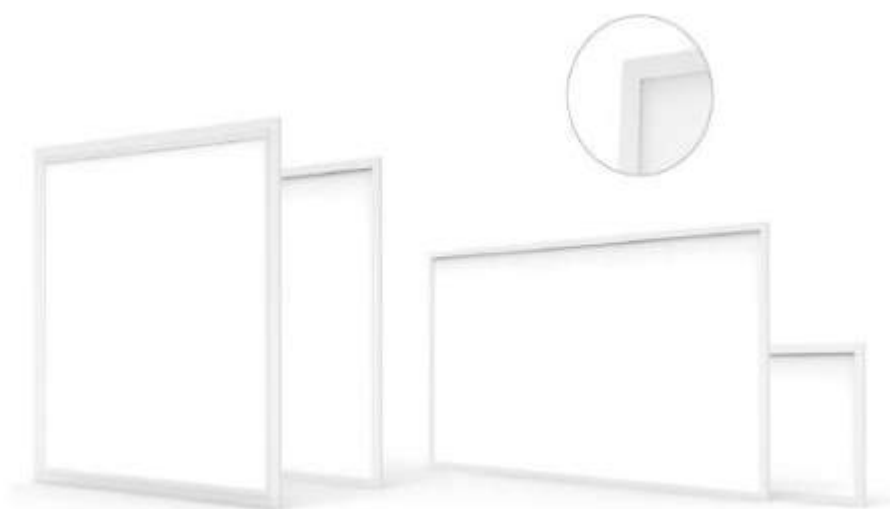

DIMENSION DRAWING (mm)

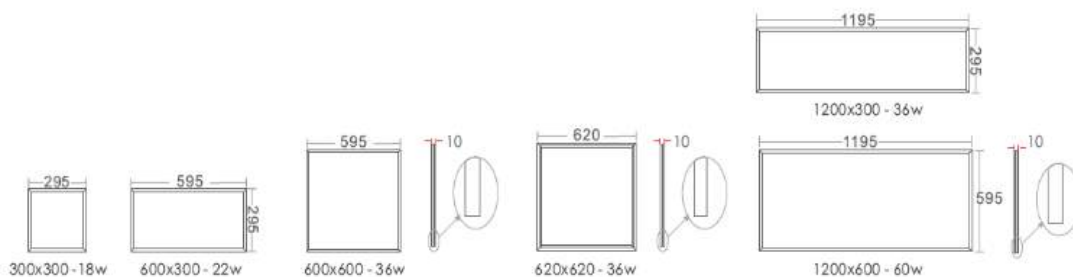

BASIC

IP20 LED PANEL

SPECIFICATIONS

Operating Temperature Range		0°C ~ +40°C
Material	Structure	Extruded aluminum
	Rim finish	Powder coated
	Back plate	Zinc Coated Iron
	Diffuser	PS (standard) / PC (option)
Colour		White RAL9016 / White RAL9003 / Aluminum
Dimmable		ON-OFF / 1-10V dimmable / DALI
Intelligent Control		Daylight Sensor/Zigbee System
IP grade		IP20 (standard) / IP54 (optional)


ACCESSORIES (Optional)



Hanging wire



Protection wire

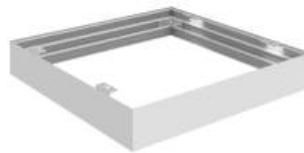

Surface mounting frame



Spring

PRODUCT PARAMETER

Model Number	Dimension	Power Wattage	CCT	Lumen Output	Diffuser	Controls	Voltage	
BS-PL-18-x-xx-x	A: 300 x 300mm	18W	3: 3000K	100lm/W	PS Polystyrene	Non-dimmable	100-240VAC 50/60Hz	
BS-PL-22-x-xx-x	A: 600 x 300mm	22W				0-10V dimming		
BS-PL-36-x-xx-x	A: 600 x 600mm	36W	4: 4000K			PC Polycarbonate	DALI dimming	220-240VAC 50/60Hz
	B: 620 x 620mm C: 1200 x 300mm		5: 5000K					
BS-PL-60-x-xx-x	A: 1200 x 600mm	60W	6: 6000K					