

SPECIAL PANEL LIGHT



PERFORMANCE

Power: 18W, 22W, 36W

Efficacy: 100lm/W

Instant ON/OFF

Ra: >80 and >90 (optional)

CCT: 3000K - 6500K

Thickness: 15mm

Lifetime: >50,000hours

Ingress Protection: 65

Operating Temperature: 0°C ~ +40°C

Warranty: 5 years limited

Flicker free illumination

Mounting: Recessed/Suspended

Symmetrical uniform distribution

Flanged/Surface


Quick and Easy installation

Colour: White & Aluminum


100 LM/W



IP65 waterproof connector and gland nut

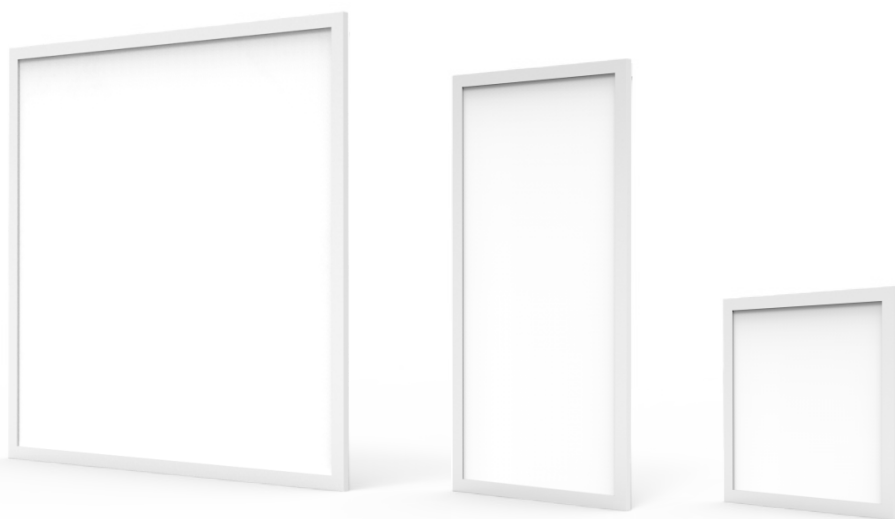

DIMENSION DRAWING (mm)

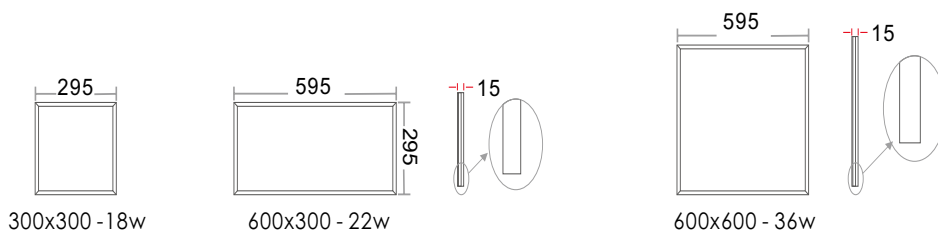

SPECIFICATIONS

Operating Temperature Range		0°C ~ +40°C
Material	Structure	Extruded aluminum
	Rim finish	Powder coated
	Back plate	Backing varnish aluminum
	Diffuser	PS
Colour (Standard)		White RAL9016
Colour (Optional)		White RAL9003/Aluminum
Connection		Waterproof connector & gland out
IP grade		IP65

PRODUCT PARAMETER

Model Number	Dimension	Power Wattage	Lumen Output @4000K	Lumen Output @5000K	Lumen Output @6500K	Voltage
SP-PL-18-xx	295 x 295mm	18W	1800lm	1890lm	1980lm	100-240VAC 50/60Hz
SP-PL-22-xx	595 x 295mm	22W	2200lm	2310lm	2420lm	
SP-PL-36-xx	595 x 595mm	36W	3600lm	3780lm	3960lm	

XX: Color temperature of panel light: WW-3000K / NW-4000K / PW-5000K / W-6500K